


FIG.1

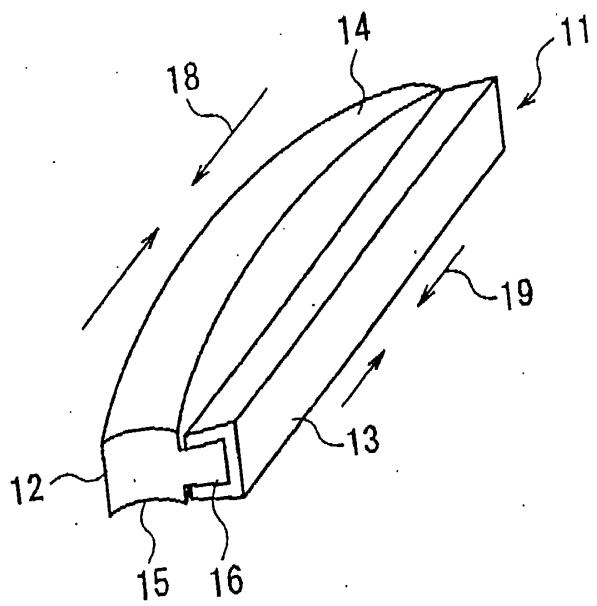

2005-07-11 09:30:01

FIG.2(a)

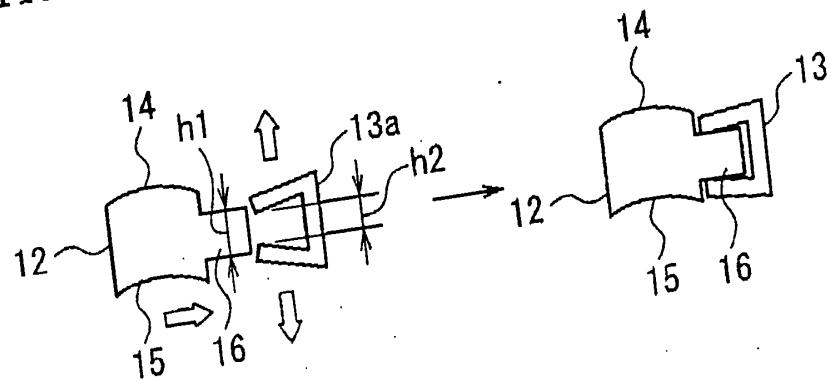


FIG.2(b)

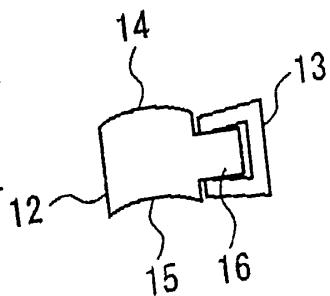


FIG.3(a)

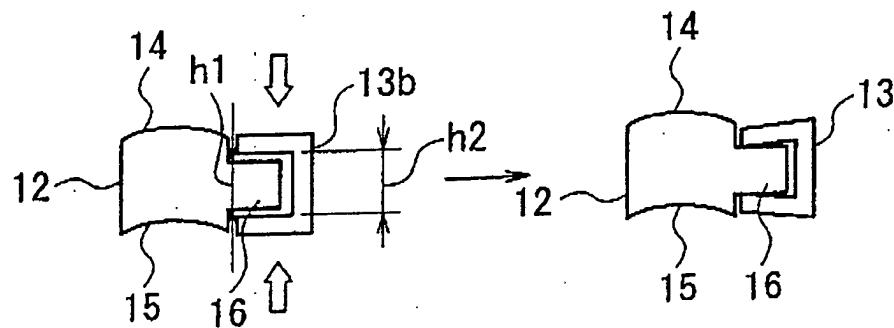


FIG.3(b)

FIG.4(a)

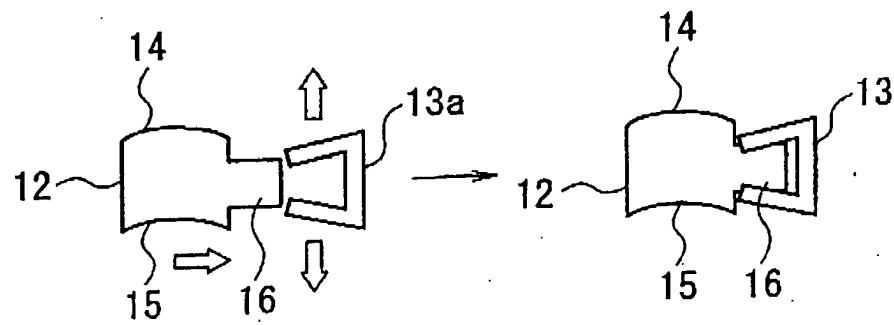


FIG.4(b)

1000504122 0011300

FIG.5(a)

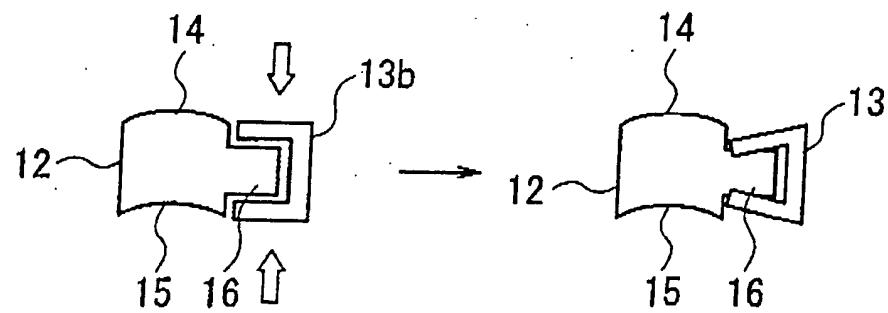


FIG.5(b)

FIG.6(a)

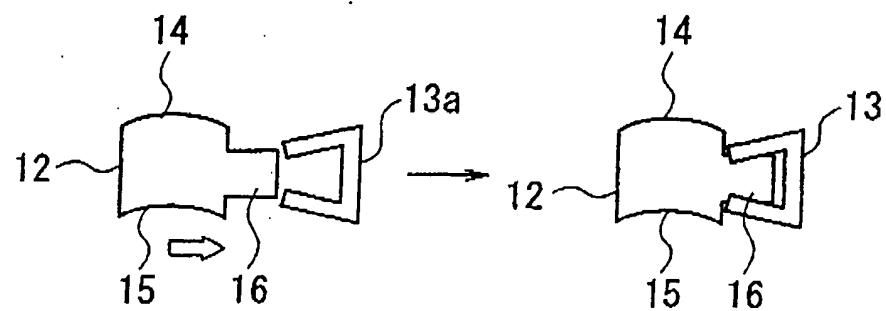


FIG.6(b)

10050437 041230

FIG.7(a)

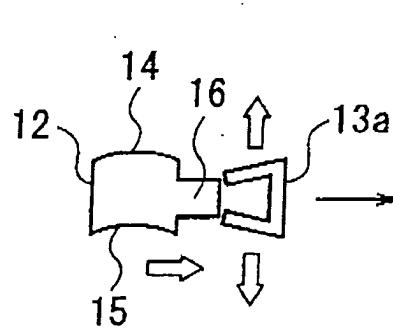


FIG.7(b)

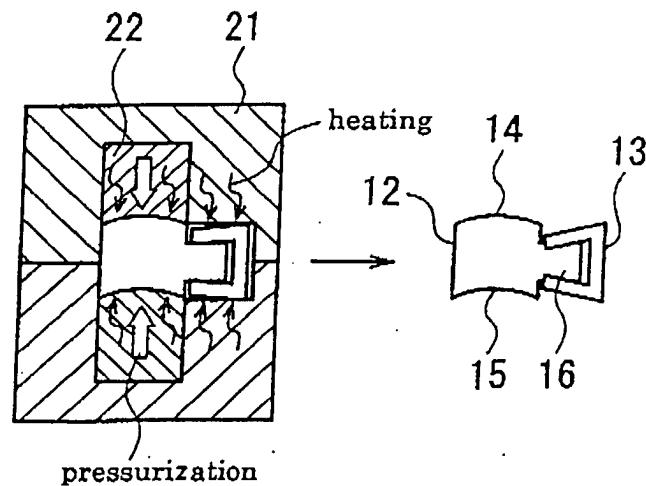


FIG.7(c)

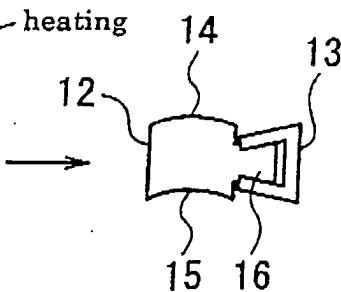


FIG.8(a)

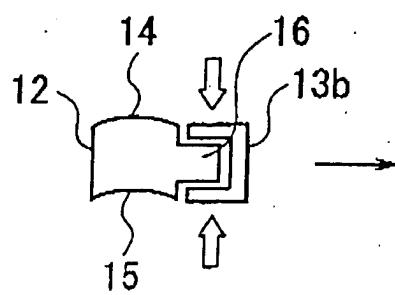


FIG.8(b)



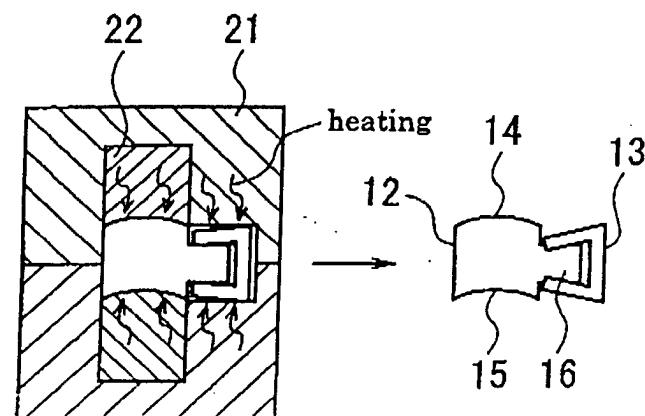


FIG.8(c)

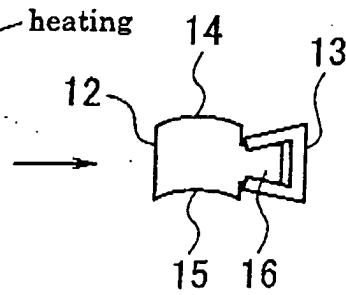

20100501473 PCT/EP2009/060007

FIG.9(a)

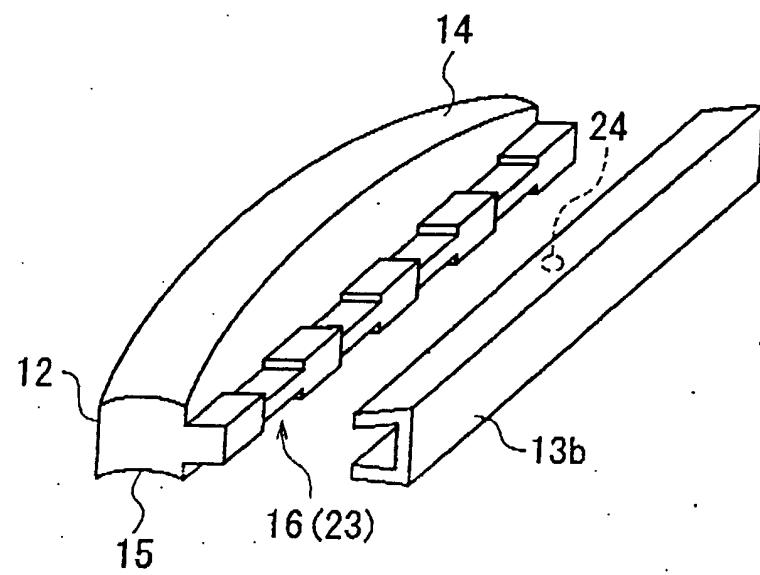

1005013.2 01962

FIG.9(b)

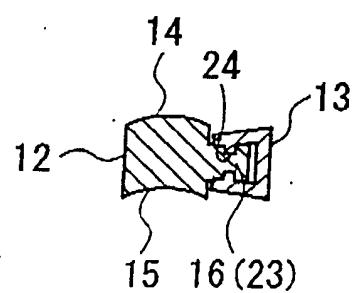


FIG.10

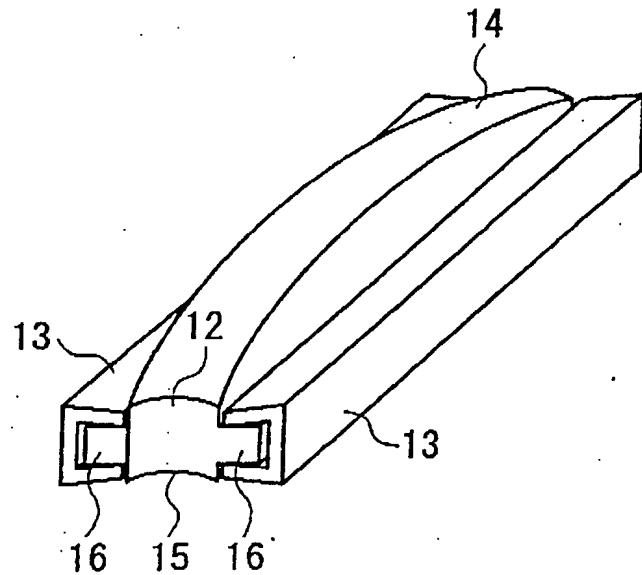


FIG.11

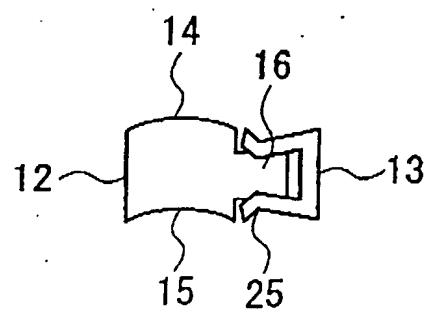


FIG.12(a)

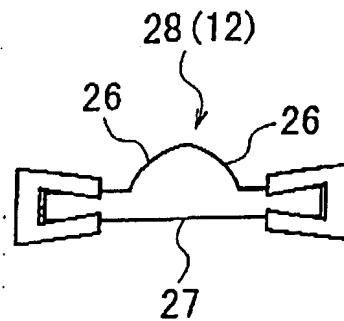


FIG.12(b)

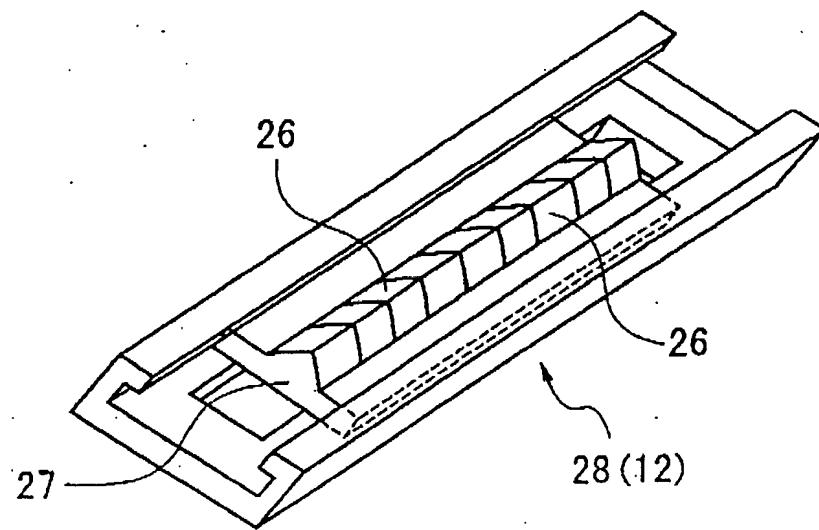


FIG.13(a)

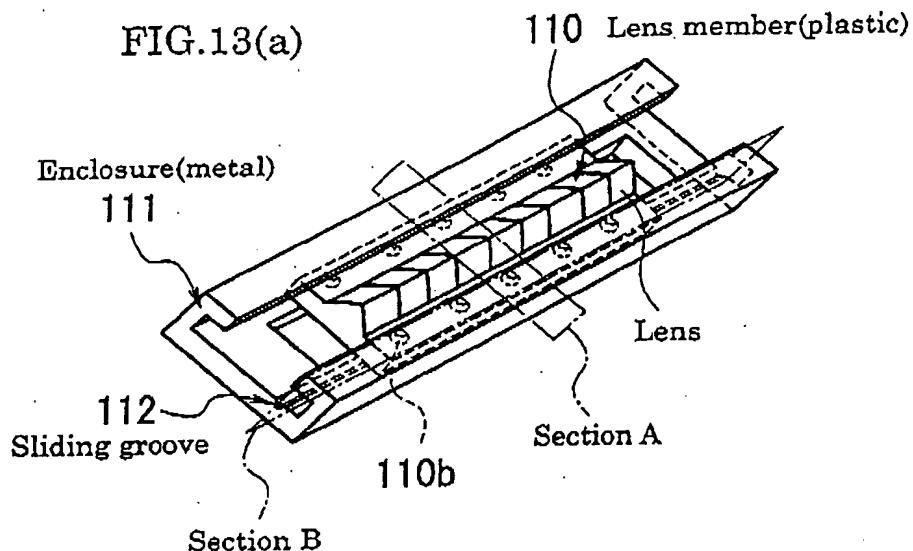


FIG.13(b)

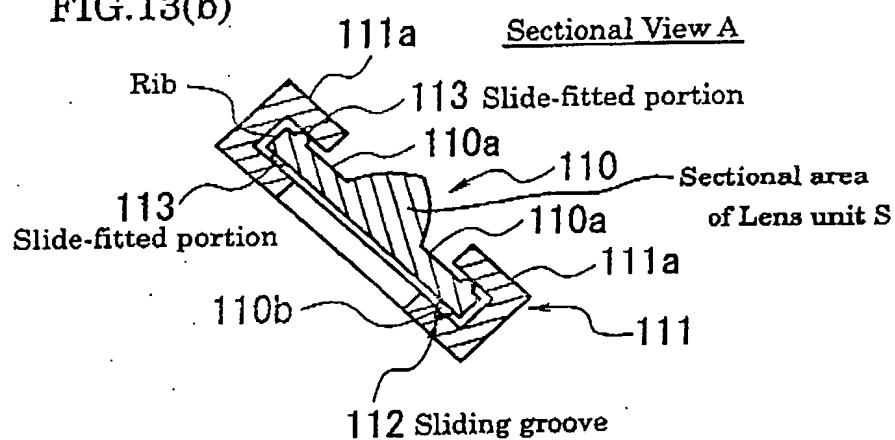


FIG.13(c)

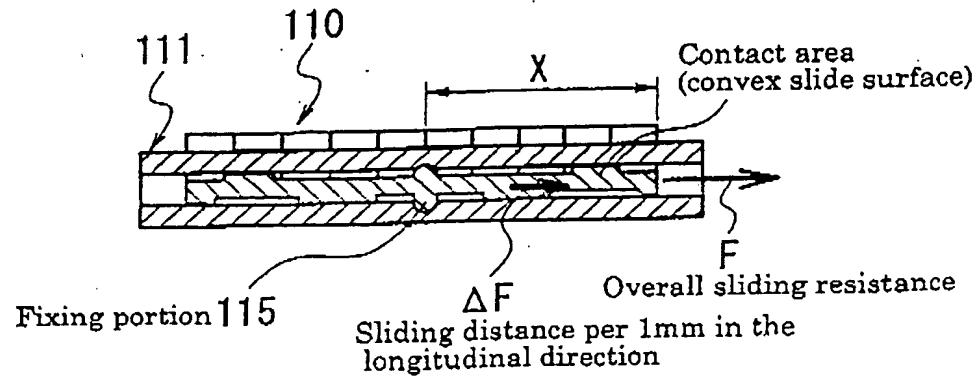


FIG.14


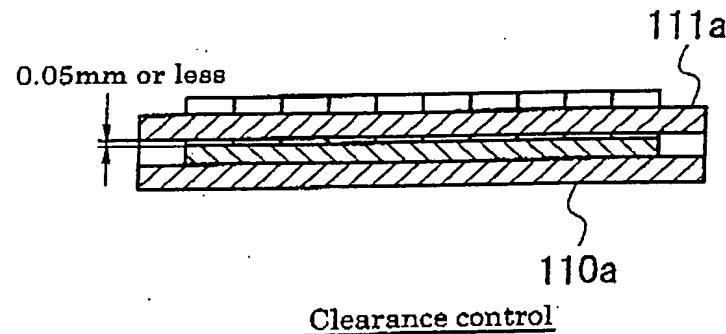


FIG.15

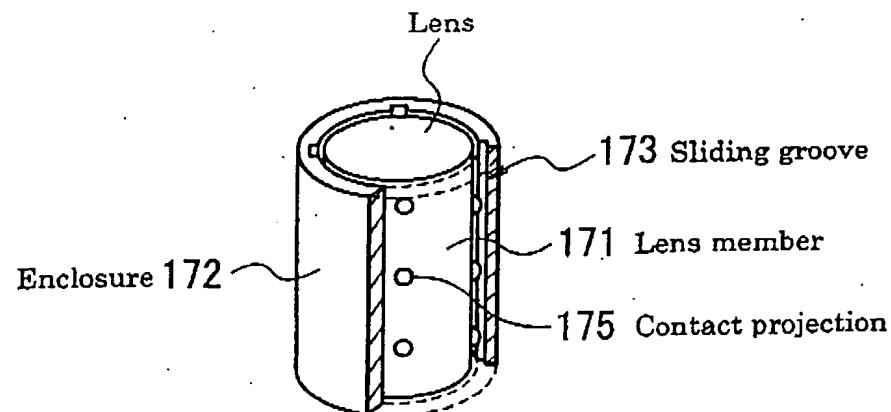

Example of Single Lens

FIG.16

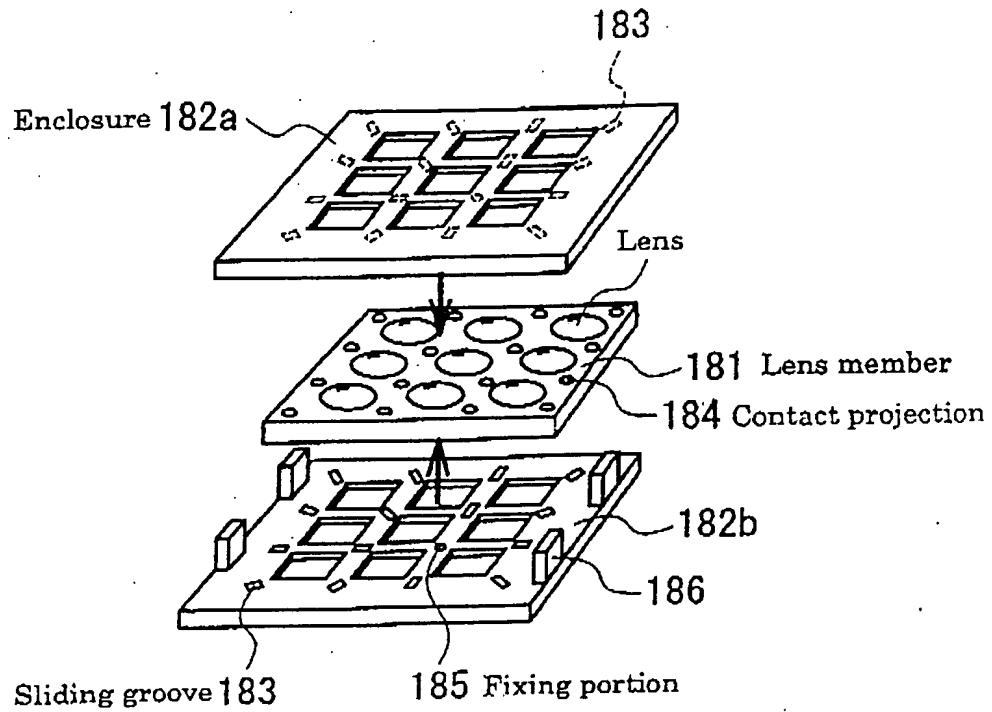


FIG.17

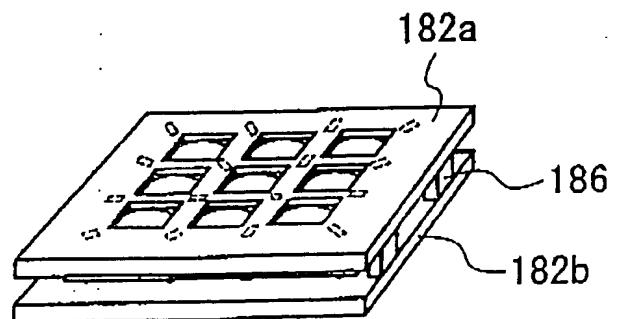


FIG.18(b)

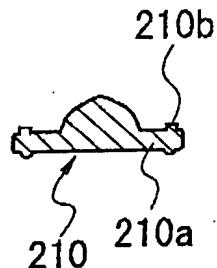


FIG.18(a)

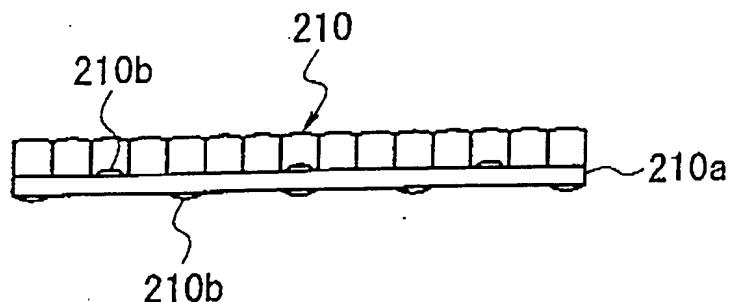


FIG.18(d)

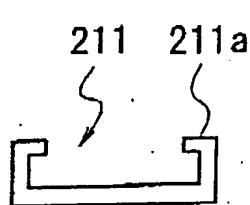


FIG.18(c)

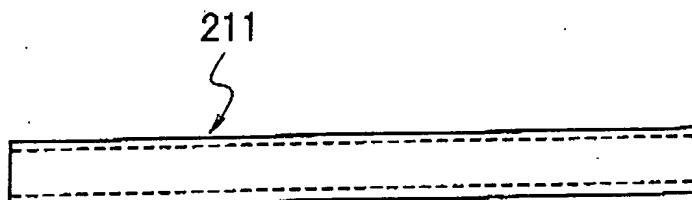


FIG.18(f)




FIG.18(e)

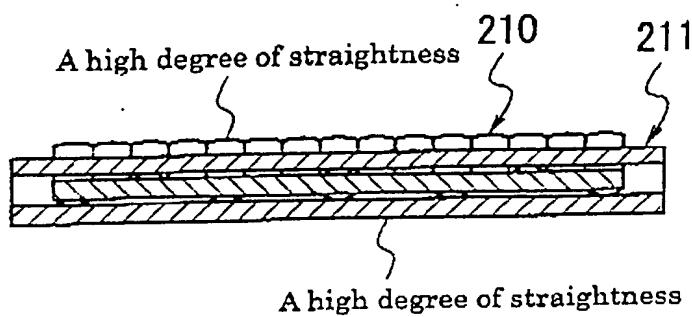


FIG.19(b)

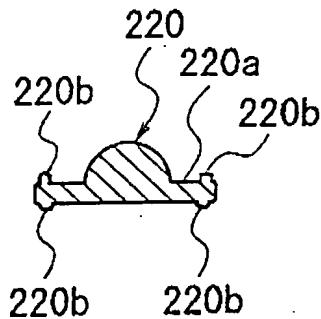


FIG.19(a)

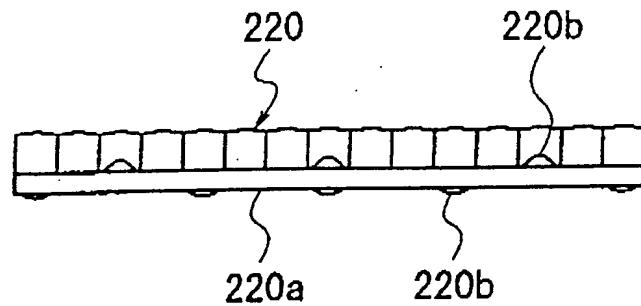


FIG.19(d)

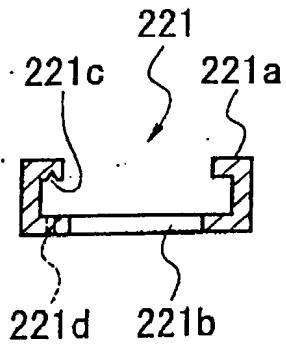


FIG.19(c)

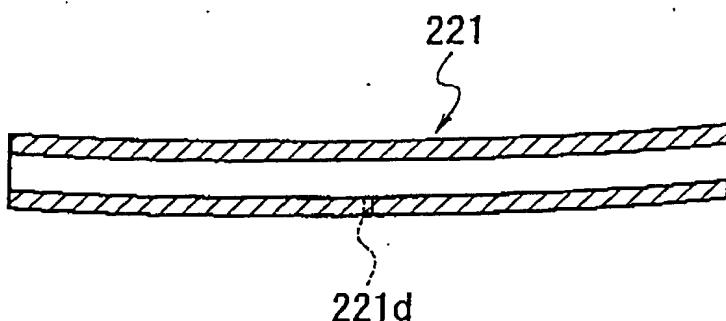


FIG.20(b)
FIG.20(a)

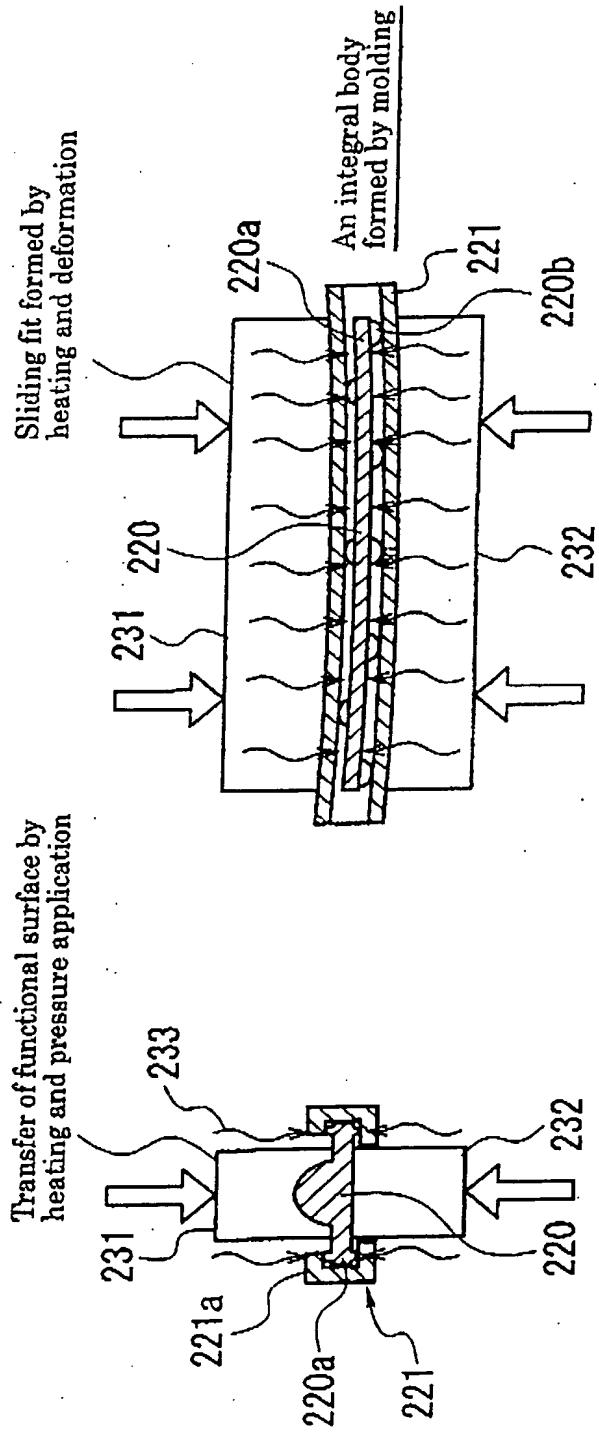


FIG.21(a)

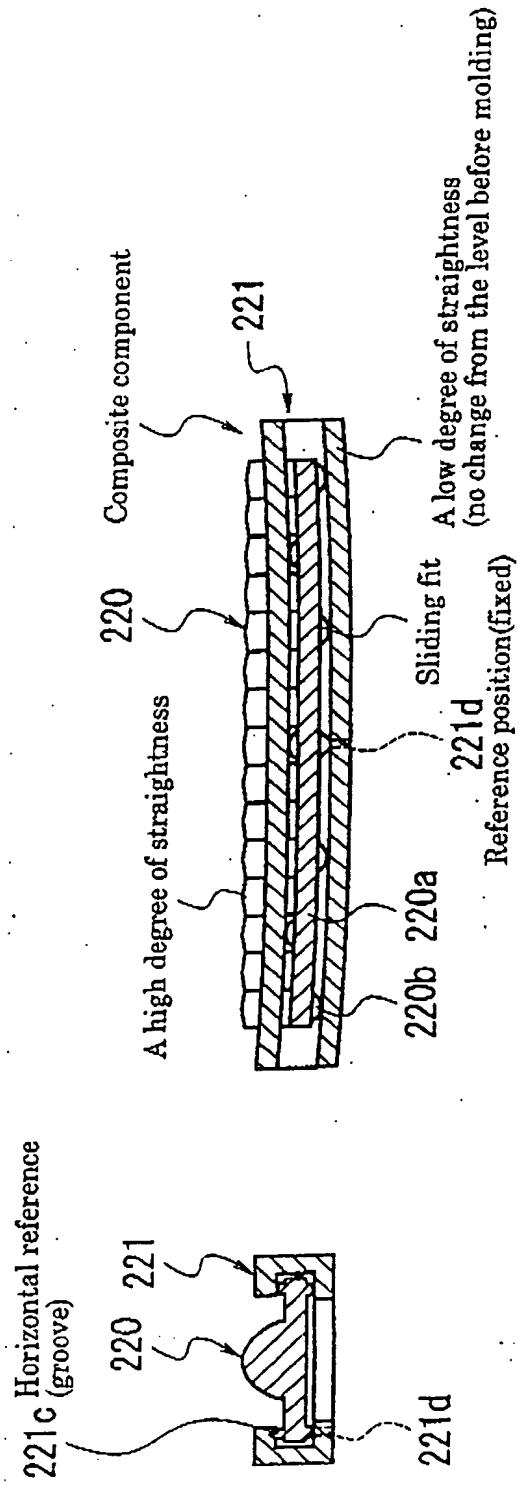


FIG.21(b)

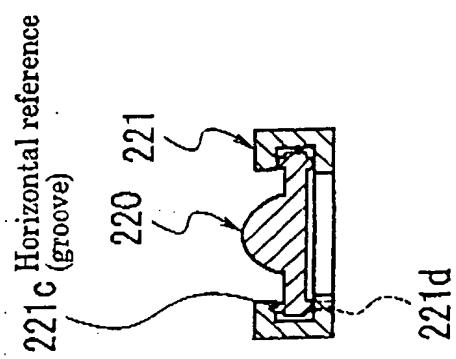


FIG.22(a)
FIG.22(b)

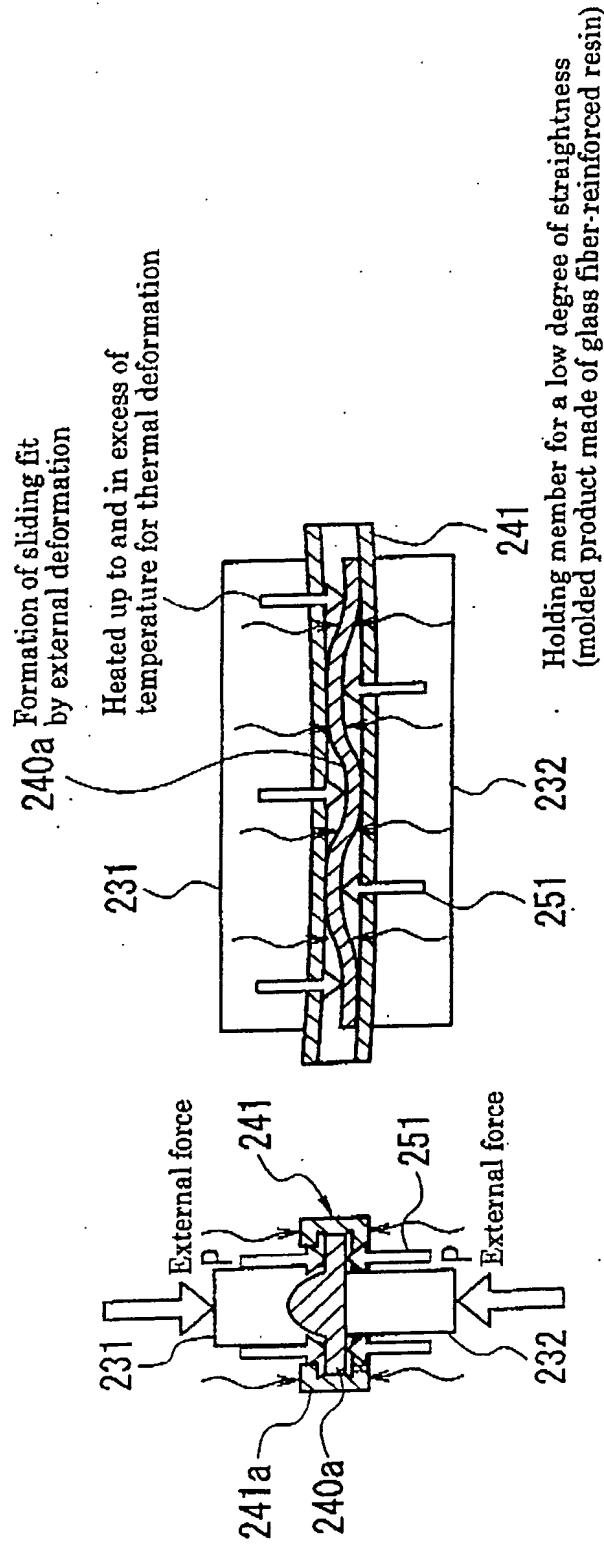


FIG. 23


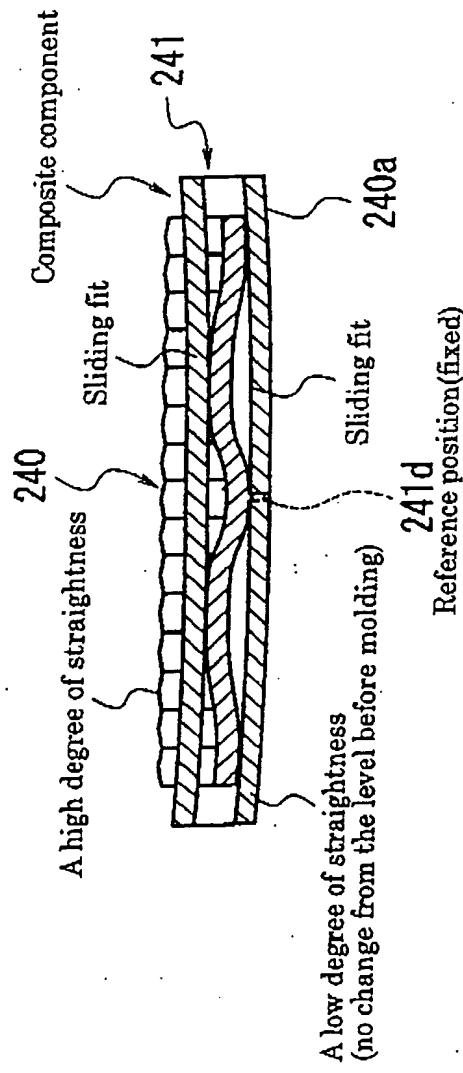


FIG.24(a)

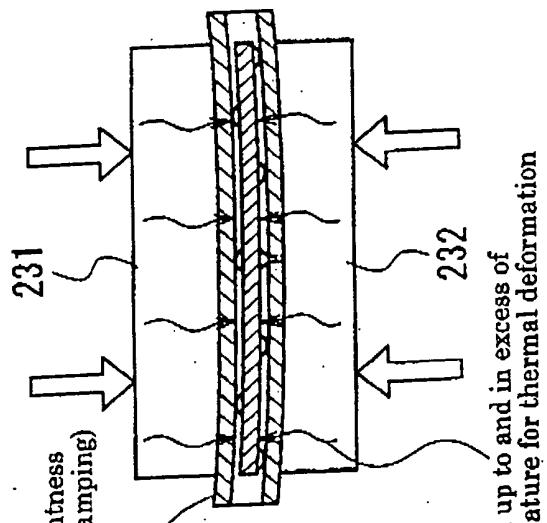

Holding member for a low degree of straightness
(Alumina extrusion plus hole formed by stamping)

Heated up to and in excess of
temperature for thermal deformation

FIG.24(b)

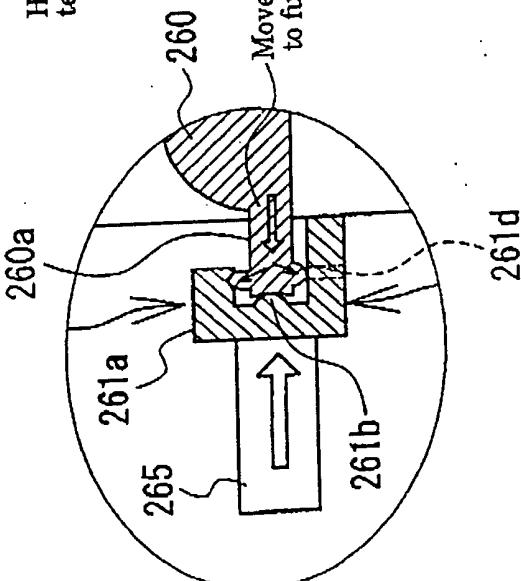
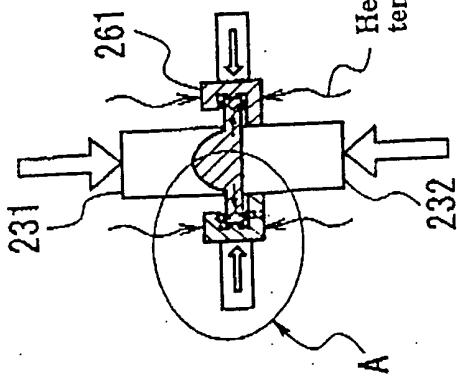


FIG.24(c)

FIG.25(b)

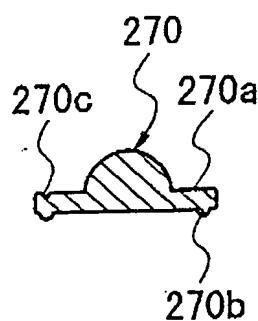


FIG.25(a)

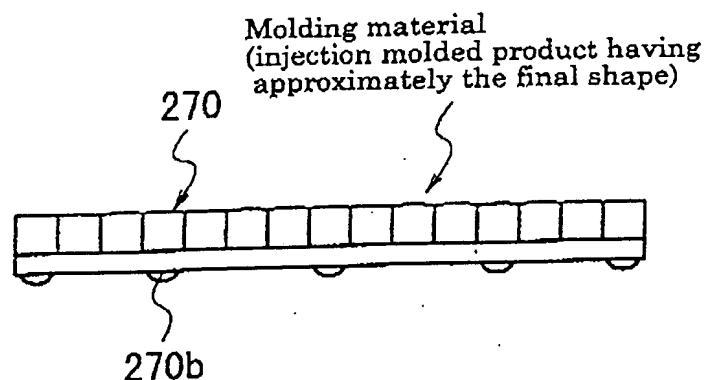


FIG.25(d)

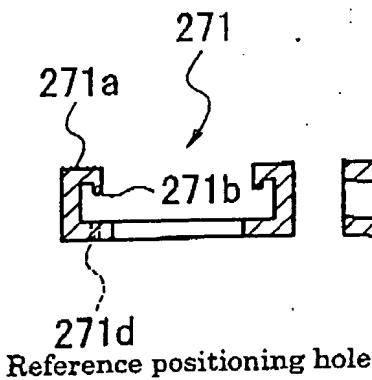


FIG.25(c)

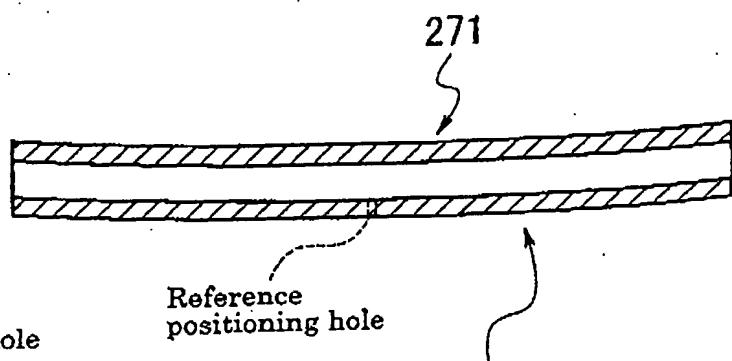


FIG.26(a)

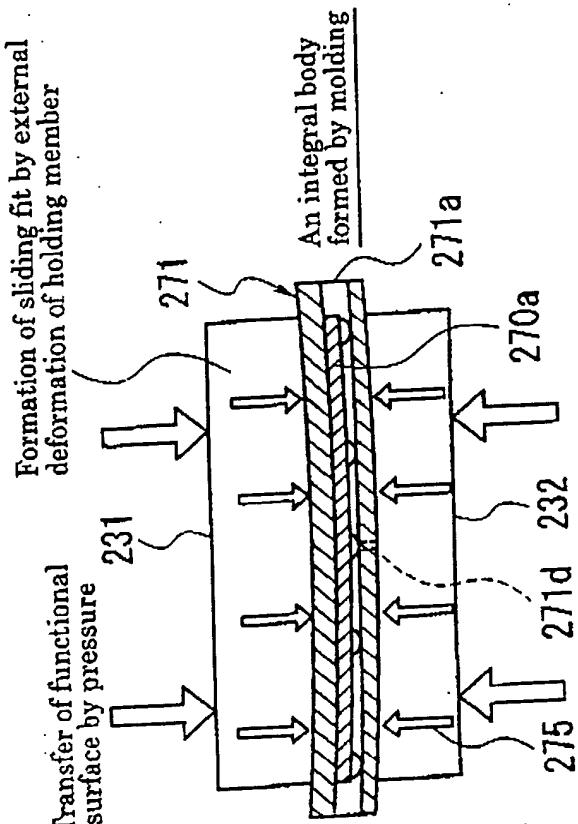


FIG.26(b)

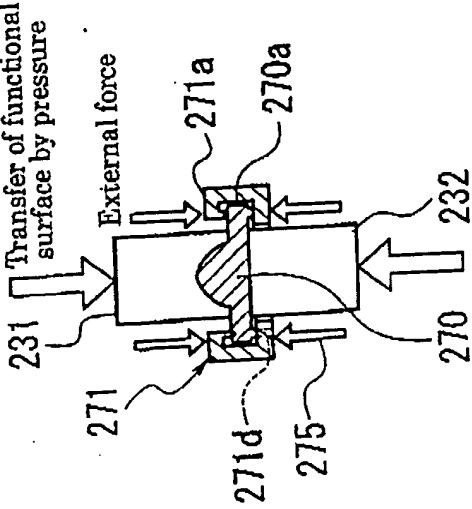


FIG.27(b)
FIG.27(a)

